


## adaptateur de jeu de barres, 32 A (32443)

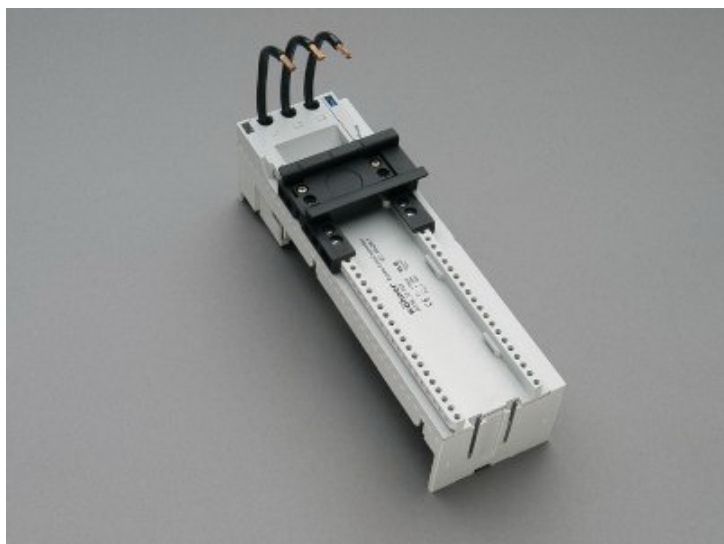

The picture may show a similar product.

### Description

Référence **32443** 000

EQUES® 60Classic

adaptateur de jeu de barres, 32 A

1 rail DIN réglable

63 x 200, avec câbles AWG 10 (6 mm<sup>2</sup>)

pour jeux de barres 12, 15, 20, 25, 30 x 5, 10 et barres profilées

### Système

60Classic

### Avantages produit

Conductor ends ultrasonically sealed.

Click mechanism when pushing onto the busbar.

Groupe de produits 05

Sous-groupe 21

Dimensions de l'emballage 4

EAN 4021267324438

ECLASS 6.1 27370304  
ECLASS 7.1 27370304  
ETIM 4.0 EC001531  
ETIM 5.0 EC001531

## Homologations

### Normes

IEC 61439-1:2020  
UL 508

### Approbations

CSA, UL



for UL feeder circuits >250V

Type: EEC6032-L

UL file: E123577, UL category (for USA): NMTR <https://www.ul.com>  
UL file: E123577, UL category (for Canada): NMTR7 <https://www.ul.com>  
CSA file: 110285, CSA class: 3211-37 <https://directories.csa-international.org>  
Homologation CCC: no certification required

## Données techniques

### Details IEC

#### Normes

IEC 61439-1:2020

#### Electrical data IEC

Courant assigné (IEC): 32 A  
Tension assignée (IEC) CA: 690 V

rated isolation voltage  $U_i$  AC: 800 V  
Tension assignée de tenue aux chocs  $U_{imp}$ : 6 kV

power dissipation of the article:

The power dissipation at a typical load of 80 % results to 1,5 W.

(The power dissipation at full load would be 2,4 W.)

## Details UL

### Normes

UL 508

for UL feeder circuits >250V

### Electrical data UL

rated current (UL): 30 A

rated voltage (UL) AC: 600 V

rated frequency (UL): 50 / 60 Hz

SCCR unprotected max.: 5 kA

3 cycles (without OPD) @ 600 V AC

SCCR protected max.: 100 kA

SCCR: 65 kA with any NKJH/7 Comb. Motor Controller type E 32 A / 480 V AC

65 kA with any DIVQ/7 circuit breaker 40 A / 480 V AC

100 kA with JDDZ fuse Class CC, CF, J or T 60 A / 600 V AC

## Caractéristiques mécaniques

L x H x P: 63 x 200 x 63

Poids: 44,5 kg/100

Pôles: 3 pôles

pour jeux de barres: 12, 15, 20, 25, 30 x 5, 10 et barres profilées

## Points de raccordement

with leads

AWG10 (6 mm<sup>2</sup>)

wire stripping: 9 mm

## Application notes


There must be a clearance of at least 12 mm above the article to remove it from the busbar system.  
For compact mounting of complete motor circuits with commercially available switchgear and safe mechanical and electrical connection to the busbar system.

the short-circuit capacity of the combination of adapter and motor starter depends on the motor starter

for UL feeder circuits >250V

## Accessoires


accessories for mounting



**32969 000**

arrêt de rail DIN

further accessories



**32963 000**

module pour montage latéral pour adaptateurs de jeu de barres  
encliquetable des deux côtés

9 x 200

pour: EEC60..

<https://pim.woehner.de/FR/FR/1000042760>